

ARCHITECTURAL USL-SP22C

Belmont Suspended Pendant



OVERVIEW

The circular Belmont pendant is built of a seamless aluminum body with an acrylic lens to evenly diffuse its down light. It is available in 3 ring sizes 16-32 inches and can be put in 3-level tiers. The suspension mounting allows for multiple rings to be placed even and concentric, or cable lengths can be adjusted to create a truly custom look.

FEATURES

- Down light
- Circular shape
- Circular profile
- 120° beam angle
- Custom configurations available
- RGB, RGBW, color tunable available



ORDERING INFORMATION

EXAMPLE PN: USL-SP22C-3-90W-30K-10V-CHRM

USL-SP22C	SIZE / POWER	CCT	DIMMING	FINISH*
1-20W	1 RING 20W 16"	27K 2700K	0 NONE	WHT MATTE WHITE
1-30W	1 RING 30W 24"	30K 3000K	10V 0-10V	CHRM CHROME
1-40W	1 RING 40W 32"	35K 3500K		RSG ROSE GOLD
2-50W	2 RINGS 50W 16" 24"	40K 4000K		
2-60W	2 RINGS 60W 24" 32"	50K 5000K		
3-90W	3 RINGS 90W 16" 24" 32"	RGB RGB		
		RGB30 RGB+3000K		
		RGB35 RGB+3500K		
		RGB40 RGB+4000K		
		RGB50 RGB+5000K		
		CT COLOR TUNING		
				3000-6000K

*Note: Standard finishes are matte white, chrome, and rose gold

ARCHITECTURAL USL-SP22C


Belmont Suspended Pendant



SPECIFICATIONS

MODEL	OPERATION VOLTAGE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-SP22C	100-277V AC	50,000 HOURS	2700K, 3000K 3500K, 4000K, 5000K	80+	80-113 lm/W




MODEL	RING SIZES (in)	POWER (W)	LUMENS (lm) at:			EFFICACY (lm/W)
			3000K	4000K	5000K	
USL-SP22C-1-20W	16	20	1,800	1,900	2,000	90-100
USL-SP22C-1-30W	24	30	2,550	2,700	3,400	85-113
USL-SP22C-1-40W	32	40	3,200	3,400	3,600	80-90
USL-SP22C-2-50W	16, 24	50	4,000	4,250	4,500	80-90
USL-SP22C-2-60W	32, 40	60	4,800	5,100	5,400	80-90
USL-SP22C-3-90W	16, 24, 32	90	7,200	7,650	8,100	80-90

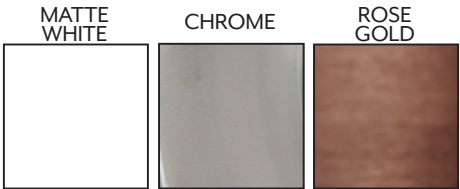


DIMENSIONS Standard ring configurations below. Additional custom configurations available.

MODEL	A RING 1	B RING 2	C RING 3	WEIGHT
1-20W	16 in 400 mm	NA	NA	7.5 lb 3.4 kg
1-30W	24 in 600 mm	NA	NA	9.5 lb 4.3 kg
1-40W	32 in 800 mm	NA	NA	10.9 lb 5.4 kg
2-50W	16 in 400 mm	24 in 600 mm	NA	14.1 lb 6.4 kg
2-60W	24 in 600 mm	32 in 800 mm	NA	18.3 lb 8.3 kg
3-90W	16 in 400 mm	24 in 600 mm	32 in 800 mm	23.1 lb 10.5 kg

L LENGTH	H HEIGHT
9.8 in 250 mm	2.4 in 60 mm

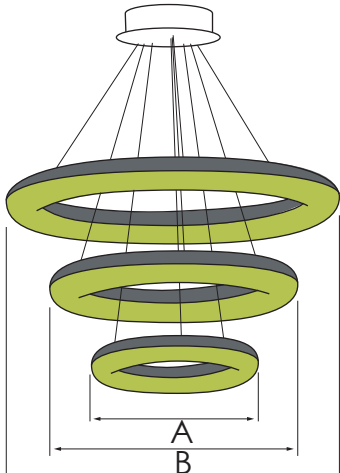

Profile view

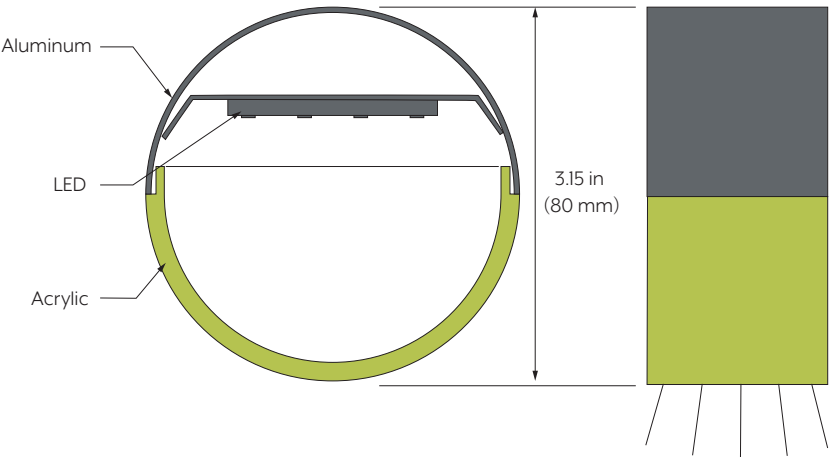

Cross Section

Side View