

ARCHITECTURAL USL-SP102C Everett Suspended Pendant



OVERVIEW

US Luminaire's Everett series LED pendants are sure to impress. Utilizing an aluminum frame, 0.3" solid acrylic lens and both down light and up light with a 360-degree spread, these provide a sleek option for architectural design.

The Everett series is designed to suspend from the ceiling and multiple fixtures can be interconnected as a long linear fixture. The Everett series is ideal for offices, reception areas, boardrooms, and anywhere else elegance is desired.

Standard colors are silver and white. Additional colors are black and bronze.



FEATURES

- Input power: 40W, 60W
- UL/cUL, DLC, FCC dry location listed,
- IP20
- 0-10V dimming available
- Beam angle: 360° for both down light and up light



ORDERING INFORMATION

EXAMPLE PN: USL-SP102C-40W-30K-SLV-10V

USL-SP102C	SIZE / POWER	CCT	FINISH	DIMMING
	40W 40 WATTS 1 BAR	30K 3000K	SLV SILVER	0 NONE
	60W 60 WATTS 2 BARS	40K 4000K	WHT WHITE	10V 0-10V
		50K 5000K	BLK BLACK	
			BNZ BRONZE	

ARCHITECTURAL USL-SP102C

Everett Suspended Pendant




SPECIFICATIONS

MODEL	OPERATION VOLTAGE	AMBIENT OPERATING TEMP	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-SP102C	100-277V AC	-40°C – 45°C -40°F – 113°F	50,000 HOURS	3000K 4000K, 5000K	80+	78-88 lm/W


MODEL	RING SIZES (in)	POWER (W)	LUMENS (lm) at:			EFFICACY (lm/W)
			3000K	4000K	5000K	
USL-SP102C-40W	8x16	40	3,300	3,400	3,500	82-88
USL-SP102C-60W	12x24	60	4,700	4,800	4,900	78-82

DIMENSIONS


MODEL	A	H HEIGHT	L LENGTH	T THICKNESS	W WIDTH	WEIGHT
USL_SP102C-40W	12.87 in	19.7-47.25 in	39.4in	0.3 in	12.4 in	11.24 lb
	327 mm	500-1200 mm	1000 mm	8 mm	315 mm	5.1 kg
USL_SP102C-60W	12.87 in	19.7-47.25 in	39.4in	0.3 in	17.72 in	16.31 lb
	327 mm	500-1200 mm	1000 mm	8 mm	450 mm	7.4 kg

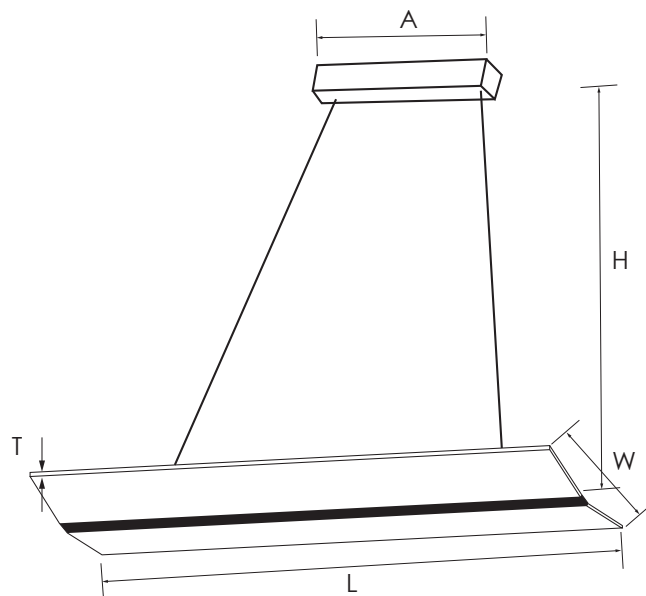


PHOTOMETRICS

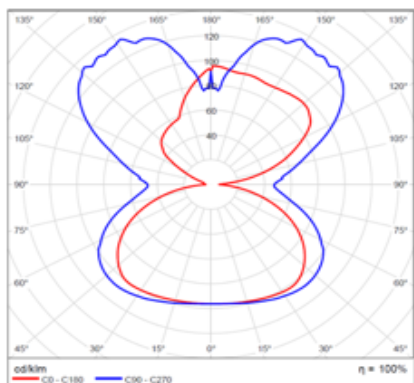


40W 3000K

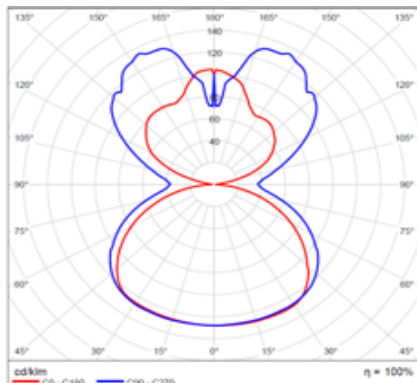


40W 4000K

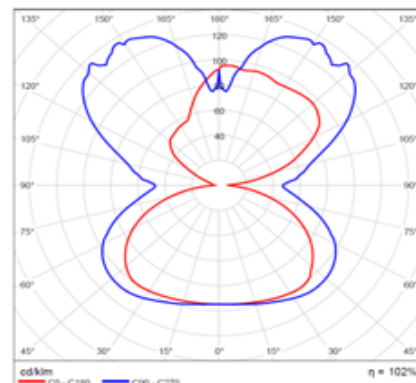


40W 5000K

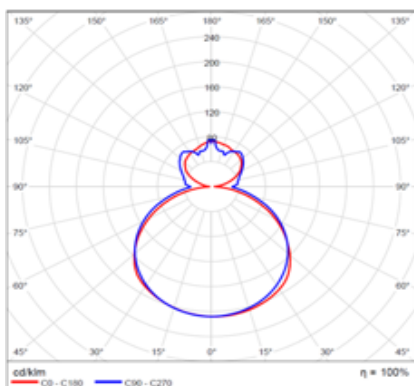

60W 3000K

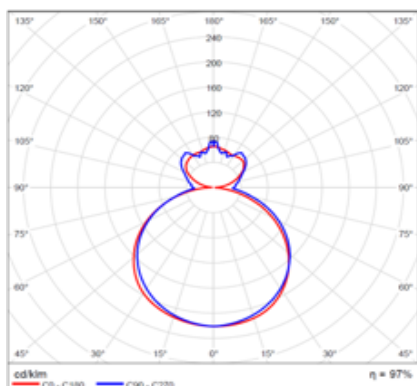

60W 4000K

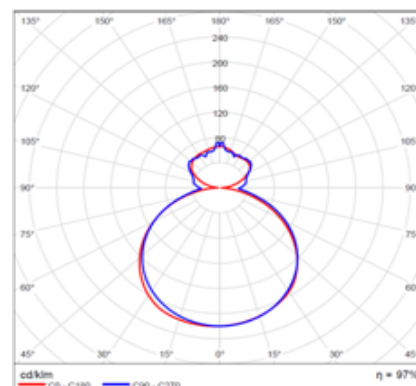

60W 5000K