

10-Inch Square Canopy Light



Exterior



Wet Location



Dimmable



AC



Down Light



5 Year Warranty



OVERVIEW

Ideally suited for indoor and outdoor applications in parking structures, storage areas, processing plants, indoor stadiums and gas stations, this ultra-slim canopy fixture is certified for wet applications. The driver has thermal overload protection and short circuit protection.



FEATURES

- IP65
- PF > 0.95
- THD < 20%
- 0-10V dimming
- Motion sensor
- Low profile sleek design
- Heat resistant polycarbonate optical lens
- Multiple conduit entry points with two sizes, three ½" threaded and one ¾"



ORDERING INFORMATION

EXAMPLE PN: USL-CNP1B-65W-LV-40K-D-0-0

USL-CNP1B	POWER*	VOLTAGE*	CCT	FINISH	DIMMING	OPTIONS
	45W 45 WATTS	LV 120-277V	30K 3000K	D DARK BRONZE	0 NONE	0 NONE
	65W 65 WATTS	34V 347V	40K 4000K	W WHITE	10V 0-10V	MS MOTION SENSOR
			50K 5000K			

* Note: 100-277V power driver is not dimmable; 347V power driver is dimmable and only available for 45W led canopy.

10-Inch Square Canopy Light


SPECIFICATIONS

MODEL	OPERATION VOLTAGE	AMBIENT OPERATING TEMP	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-CNP1B	120-277V 347V	-30°C – 45°C -22°F – 113°F	100,000 HOURS	2700K, 3000K 4000K, 5000K	75+	117-118 lm/W

MODEL	POWER (W)	VOLTAGE (V)	LUMENS (lm)	EFFICACY (lm/W)	REPLACES
USL-CNP1B-45W-LV	45	120-277	5,300	117	70-150W HPS , 100W PSMH 150 MH, 165 HID
USL-CNP1B-45W-34V	45	347	5,300	117	
USL-CNP1B-65W-LV	65	120-277	7,700	118	100-200W HPS, 175-250W MH

DIMENSIONS

MODEL	W WIDTH	H HEIGHT	WEIGHT
ALL	10.05 in 255 mm	3.3in 84 mm	595 lb 2.7 kg

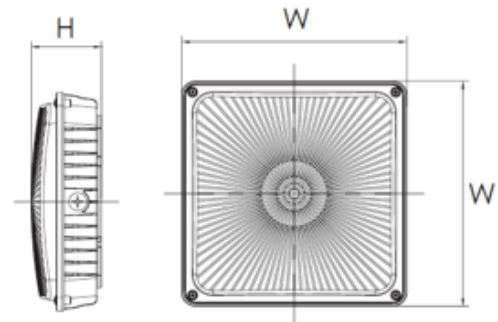

PHOTOMETRICS

