

INTERIOR USL-RF2L

Double Ring Flush Mount Residential Fixture



PROJECT

TYPE

DATE



Interior



Damp Location



Dimmable



AC



Down Light



Warranty




OVERVIEW

This fixture uses an integrated LED module instead of standard light bulbs. The housing has opaque white acrylic cover. It can be mounted on the ceiling or wall.

FEATURES

- 120° beam angle
- Dims 10% to 100%
- Brushed nickel finished rings
- PF > 0.9

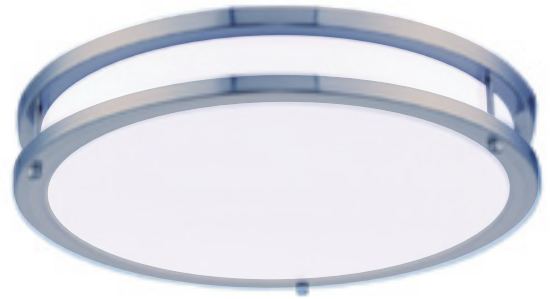

ORDERING INFORMATION

EXAMPLE PN: USL-RF2L-14C-20W-30K-DS

USL-RF2L	SIZE / POWER / CCT	CCT	FINISH
12C-15W	12 INCH, 15 WATTS	30K 3000K	DS DOUBLE SILVER TRIM
14C-20W	14 INCH, 20 WATTS	50K 5000K	
16C-25W	16 INCH, 25 WATTS		

Double Ring Flush Mount Residential Fixture


SPECIFICATIONS

MODEL	OPERATION VOLTAGE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-RF2L	120V	50,000 HOURS	3000K, 5000K	80+	70 lm/W

MODEL	DIAMETER (in)	POWER (W)	LUMENS (lm) ±10%		REPLACES	EFFICACY (lm/W)
			3000K	5000K		
USL-RF2L-12C	12	15	1,050	1,050	75W	70
USL-RF2L-14C	14	20	1,400	1,400	80W	70
USL-RF2L-16C	16	25	1,750	1,750	80W	70

DIMENSIONS

MODEL	D DIAMETER	H HEIGHT	WEIGHT
USL-RF2L-12C	12 in 304.8 mm	3 in 76.2 mm	1.68 lbs 0.76 kg
USL-RF2L-14C	14 in 355.6 mm		2.08 lbs 0.94 kg
USL-RF2L-16C	16 in 406.4 mm	3.5 in 88.9 mm	2.8 lbs 1.27 kg

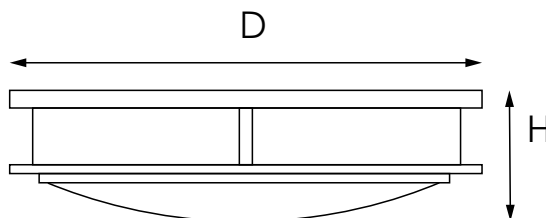

MOUNTING INFORMATION

